


# Multicore Speaker Cables

This range of speaker cables has been designed for the connection of multi-amplifier systems. The outer jacket of flexible flame resistant PVC makes these cables suitable for indoor and outdoor use. The poles are red (+) and black (-) color plus the channel identification number (e.g.: 2, 3 & 4).



MOBILE
JACKET COLOR ■
200 m ON WOODEN REELS
FLAME RESISTANT: IEC 60332-3 CAT. "C", EN 50266-2

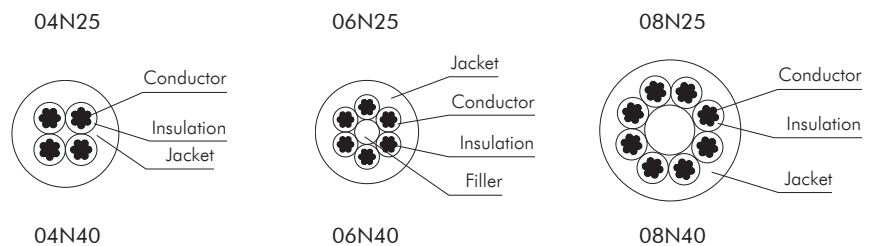

<b>Multicore</b>
• Available in 2.50 and 4.00 mm <sup>2</sup> both for 4, 6 and 8 poles (2, 3 & 4 ways) and in 4.00 mm <sup>2</sup> for 16 poles (8 ways) and 24 poles (12 ways).

CVS LK Code	04N25	04N40	06N25	06N40	08N25	08N40	16N40	24N40*	
<b>GENERAL DATA</b>									
Cable	O.D.	11.10 mm	13.20 mm	14.20 mm	15.50 mm	16.00 mm	19.50 mm	21.50 mm	27.80 mm
	Standard reels	200 m						152 m	200 m
	Weight Kg/100 m	21.50	34.50	35.00	52.00	47.00	70.50	93.90	153.00
	Operating temperature	5°C/+70°C							
Jacket	Material	PVC fire resistant							
	Nom. Thick.	≥ 1.20 mm	≥ 1.80 mm	≥ 1.60 mm	≥ 1.50 mm	≥ 1.60 mm	≥ 1.80 mm	2.20 mm	
Conductor	D.C.R. ohm/km at 20° C	8	5	8	5	8	5		
	Quantity	4		6		8		16	24
	Strand	80 x 0.20 mm	128 x 0.20 mm	80 x 0.20 mm	128 x 0.20 mm	80 x 0.20 mm	128 x 0.20 mm	80 x 0.20 mm	128 x 0.20 mm
	Area/AWG	2.50 mm <sup>2</sup> /13	4.00 mm <sup>2</sup> /11	2.50 mm <sup>2</sup> /13	4.00 mm <sup>2</sup> /11	2.50 mm <sup>2</sup> /13	4.00 mm <sup>2</sup> /11	4.00 mm <sup>2</sup> /11	
	Insul. O.D.	3.4	4.0	3.4	4.0	3.4	4.0	4.0	3.6
	Material	PVC fire resistant							

\* on request